

Kadi-Tala (200 mm)



Product Features:

- Convenient aldrop and padlock function.
- Precision 6 lever double locking mechanism.
- Handle bar can be locked in withdrawn position.
- Anti-theft mounting screws.
- Delrin weather-proof bushing for smooth movement of handle bar.
- Superior corrosion protection on steel components.

Applications:

- Single panel doors.
- Fitting on outside of door panel.

Technical Data For Kadi-Tala (200 mm):

Product code	: 5093 (Chrome)
	: 5091 (Texture brown)
Baan code	: LKYLPA605 (Chrome)
	: LKYLPA604 (Texture brown)
Type	: For single panel door
Size	: 200 mm

Kadi-Tala (200 mm)

Material Specifications:

Sr.No.	Component	Material	Finish
1	Handle grip	Steel	Bright nickel-chrome-plated/power-coated
2	Handle collar	Mazak	Bright nickel-chrome-plated/power-coated
3	Handle bar	Steel	Bright nickel-chrome-plated/power-coated
4	Locking bolt	Steel	Zinc-plated
5	Back cover	Steel	Bright nickel-chrome-plated/power-coated
6	Outer cover	Steel	Bright nickel-chrome-plated/power-coated
7	Bracket	Steel	Bright nickel-chrome-plated/power-coated
8	Facia	Aluminium	Anodised
9	Key	Cold rolled brass	Bright acid dip
10	Lever	Brass	--
11	Lever spring	Phosphor bronze	--
12	Cap screw	Steel	Bright nickel-chrome-plated/power-coated
13	Mounting screw	Steel	Bright nickel-chrome-plated/power-coated
14	Rivet for facia	Steel	Zinc-plated
15	Ferrule	Brass	--
16	Bar guide	Delrin	--

Handle bar diameter : 16 mm

Thickness of key : 2.34 mm

Thickness of levers : 1.5 mm

Number of levers : 6 as per key combinations

Net weight (when packed) : 0.880 kg

Operation:

Lock is unlocked with one rotation (clock-wise) of key and handle bar is to be withdrawn. For locking, handle bar is to be pushed in and then key is to be rotated, one turn anti-clockwise. Handle bar can also be kept in locked condition in withdrawn position, by rotating the key in anti-clockwise direction.


Packing Contents:

1. Lock
2. Bracket
3. Bracket insert
4. Keys - 3 nos.
5. Handle bar
6. Mounting screw sets - 6 nos.
7. Fitting instruction slip and Marker

Standard Packing:

One lock is packed in 3-ply corrugated box of size 210 mm X 105 mm X 30 mm and then put inside a duplex board box.

Twelve boxes, i.e. 12 locks are packed in 5-ply corrugated box of size 430 mm X 235 mm X 132 mm and weight 11.00 kg. (approx).

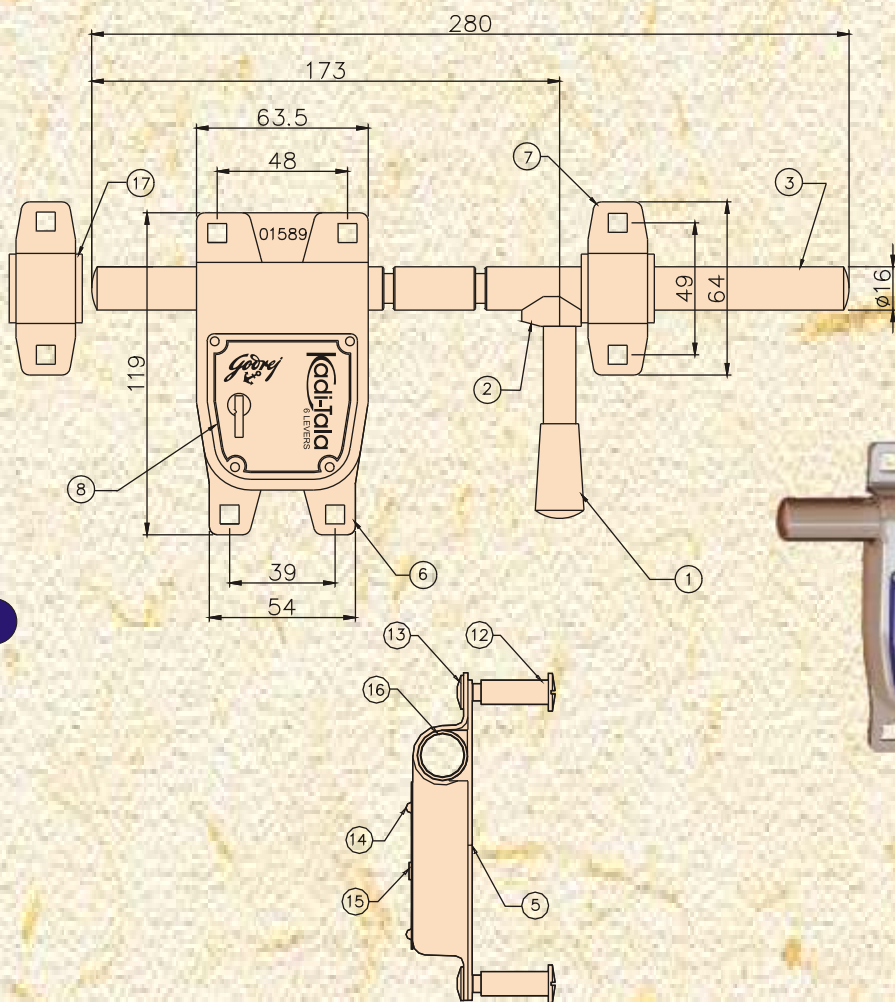

Kadi-Tala (275 mm)



Product Features:

- Convenient drop and padlock function.
- Precision 6 lever double locking mechanism.
- Anti-theft mounting screws.
- Delrin weather-proof bushing for smooth movement of handle bar.
- Superior corrosion protection on steel components.

Technical Data For Kadi-Tala (275 mm):

Product code	: 5094 (Chrome) 5092 (Texture brown)
Baan code	: LKYLPA602(Chrome) LKYLPA601 (Texture brown)
Type	: For double panel door
Size	: 275 mm

Applications:

- Double panel doors.
- Fitting on outside of door

Kadi-Tala (275 mm)

Material Specifications:

Sr.No.	Component	Material	Finish
1	Handle grip	Steel	Bright nickel-chrome-plated/power-coated
2	Handle collar	Mazak	Bright nickel-chrome-plated/power-coated
3	Handle bar	Steel	Bright nickel-chrome-plated/power-coated
4	Locking bolt	Steel	Zinc-plated
5	Back cover	Steel	Bright nickel-chrome-plated/power-coated
6	Outer cover	Steel	Bright nickel-chrome-plated/power-coated
7	Bracket	Steel	Bright nickel-chrome-plated/power-coated
8	Facia	Aluminium	Anodised
9	Key	Cold rolled brass	Bright acid dip
10	Lever	Brass	--
11	Lever spring	Phosphor bronze	--
12	Cap screw	Steel	Bright nickel-chrome-plated/power-coated
13	Mounting screw	Steel	Bright nickel-chrome-plated/power-coated
14	Rivet for facia	Steel	Zinc-plated
15	Ferrule	Brass	--
16	Bar guide	Delrin	--

Handle bar diameter : 16 mm

Thickness of key : 2.34 mm

Thickness of levers : 1.5 mm

Number of levers : 6 as per key combinations

Net weight (when packed) : 1.000 kg

Packing Contents:

1. Lock
2. Bracket - 2 nos.
3. Bracket insert - 2 nos.
4. Keys - 3 nos.
5. Handle bar
6. Mounting screw sets - 8 nos.

Operation:

Lock is unlocked with one rotation (clock-wise) of key and handle bar is to be withdrawn. For locking, handle bar is to be pushed in and then key is to be rotated, one turn anti-clockwise.

Standard Packing:

One lock is packed in 3-ply corrugated box of size 285 mm X 105 mm X 30 mm and then put inside a duplex board box.

Twelve boxes, i.e. 12 locks are packed in 5-ply corrugated box of size 430 mm X 310 mm X 135 mm and

NOTE: A set of these locks with common key system can be made to order and supplied.

BACK